



# JHP Sliding Armrest fitting instructions

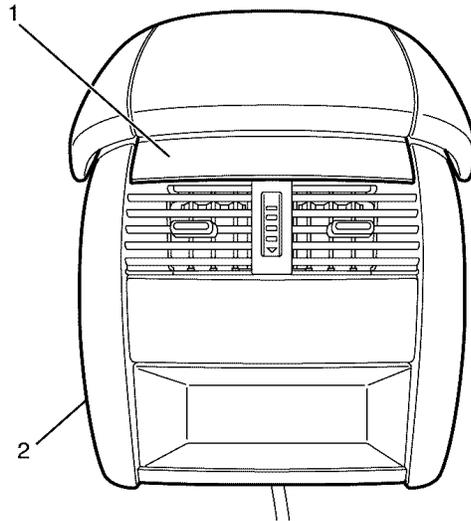


**Important:** Raise the arm rest and from inside the front floor console compartment carefully lift upwards with a small flat blade screwdriver to detach the retaining clips. Lower the armrest.

1. Remove the front floor console upper trim panel (1) from the end panel (2).

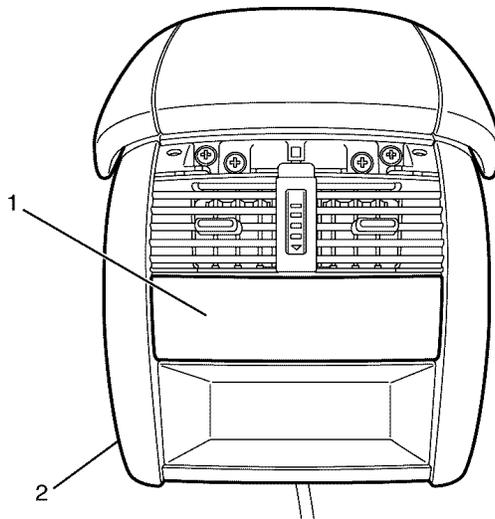


**Important:** Carefully lift upwards with a small flat blade screwdriver to detach the retaining clips.

2. Remove the rear floor console lower trim panel (1) from the end panel (2).

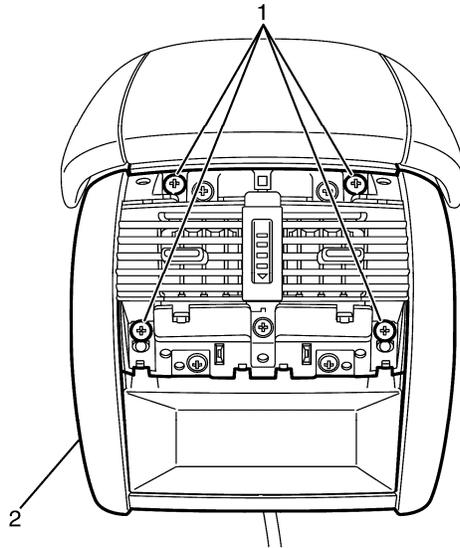


3. Remove the end panel to front floor console retaining screws (1).
4. Remove the end panel (2) from the front floor console.
5. Open the armrest assembly to 180° to the horizontal position.

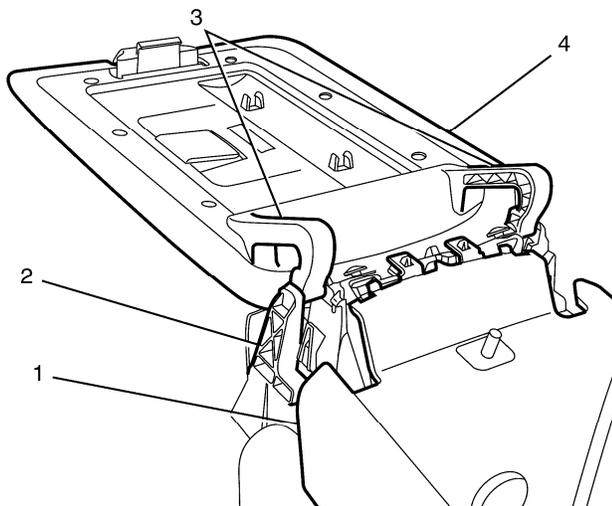


6. Using a suitable tool spread the centre console retaining lugs (2) away from the armrest assembly arms (3) and remove the armrest assembly (4) from the centre console (1).

## Installation Procedure

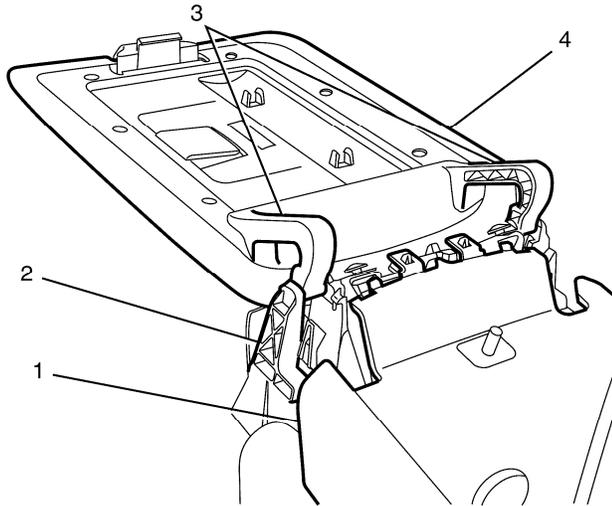


1. Align the armrest assembly (4) with centre console assembly (1).
2. Install the armrest assembly arms (3) by firmly inserting it into the centre console retaining lugs (2) listen for an audible click to confirm fitting.
3. Close the armrest assembly (4).

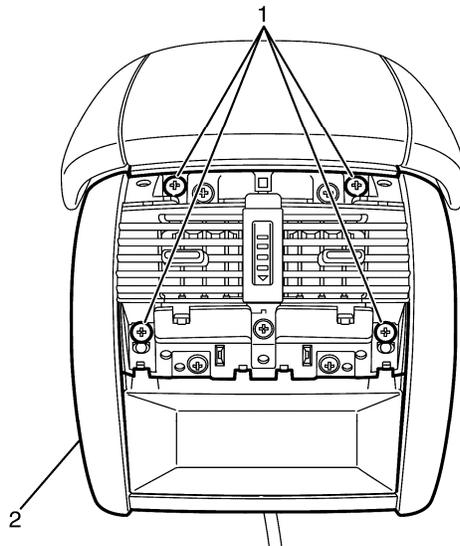


1. Install the end panel (2) to the front floor console.  
**Notice:** Refer to [Fastener Notice](#) in the Preface section.
2. Install the end panel to front floor console retaining screws (1).

Tighten  
Tighten the screws to 2 N·m (18 lb in).

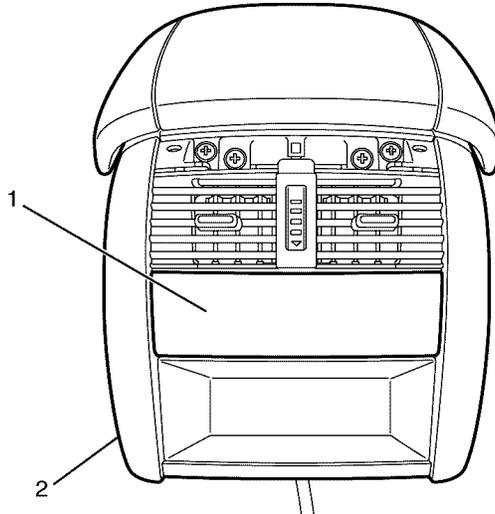

**Important:** The front floor console lower trim panel (1) is retained by clips. Make sure all the clips are aligned with the front floor console and are engaged to avoid an induced rattle condition.

3. Install the front floor console lower trim panel (1) to the end panel (2). Listen for an audible click to confirm fitting.

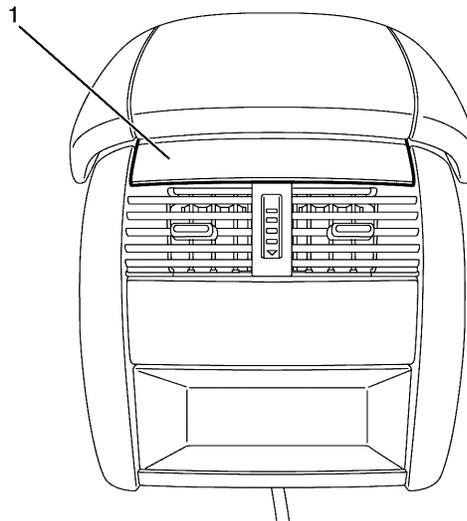

**Important:** The front floor console upper trim panel (1) is retained by clips. Make sure all the clips are aligned with the front floor console and are engaged to avoid an induced rattle condition.

4. Align the upper trim panel (1) with the console end panel.
5. Push down on the upper trim panel (1) to engage retaining clips. Listen for an audible click to confirm fitting.